



Bio-Based Wood Oil

FORMULATED WITH NATURAL OILS & WATER

Naturally protect, preserve and enhance. A naturally based penetrating treatment for wood, its unique formulation works to protect, enhance and preserve the wood, without the use of hydrocarbons, solvents, aggregates or abrasives.

With the help of natural oils, the wood is enhanced and protected, water is repelled from the surface so the timber is more durable and dryer for longer periods. It will resist the growth of spores and algae, allowing the substrate to last longer.

Surface Preparation:

Always test a small hidden portion of the substrate before use, to ensure the final result is satisfactory and to calculate consumption.

Ensure the surface to be treated is dry, clean, free from any contaminants including dust, dirt, oil, grease. Algae, moss and spores must be treated and removed with an algacide before application, all residues of the algacide need to be removed and allowed to dry before applying the Wood oil.

For best results first use a power washer to remove the dirt and grime from between the grooves of the decking.

Remove previous coatings such as paint, varnish or stain fully before applying the Wood Oil.

How to use:

- Supplied ready to use do not dilute. Shake the container well before use Ensure surface is thoroughly dry and clean before proceeding. Do not pour directly onto the surface.
- Apply a thin even coat with a brush, in the direction of the wood grain. Mop up pooling as you go using a lint free cloth.
- Allow the first coat to fully dry, and then apply a second coat
- Leave to dry for at least 24 hours before subjecting to heavy traffic.


Coverage:

Spread rates vary dependant on the type, age and porosity of the wood, for example:

- New decking / wood 4-6m² per litre
- 3 year old decking / wood 2-4m² per litre

Important information:

Do not apply in wet weather, when rain is imminent or before surface is completely dry. Keep pets away until surface is fully dry.

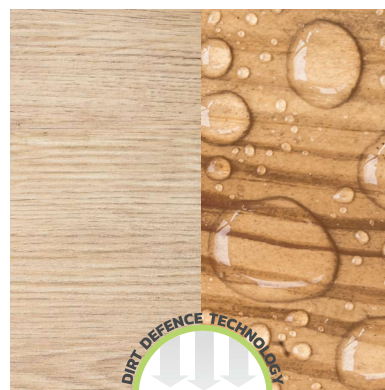

Benefits:

- Smooth Finish
- Solvent free and easy to use
- Repels moisture
- Reduces the growth of moss and algae
- Long lasting technology
- Allows the wood to breathe
- Enhances the colour of the decking /wood
- Suitable for vertical and horizontal surfaces
- Ideal for both rough sawn or smooth timber

Precautions for use:

For Health & Safety instructions, first aid measures, spillages and disposal instructions, see separate Health & Safety Data Sheet (MSDS).

Cleaning of equipment:

Remove as much excess product as possible and clean tools and equipment immediately after use with soapy water.

Product Characteristics

Colour	Various Colours Available
Odour	Barely Perceptible
Form	Liquid
PH	7
Application Temperature	Between 5°C and 30°C
Shelf Life	24 Months from the date of manufacture in the original unopened container
Specific Gravity @ 25 °C	0,99